



GATEWAY MONUMENT CONCEPT MODEL

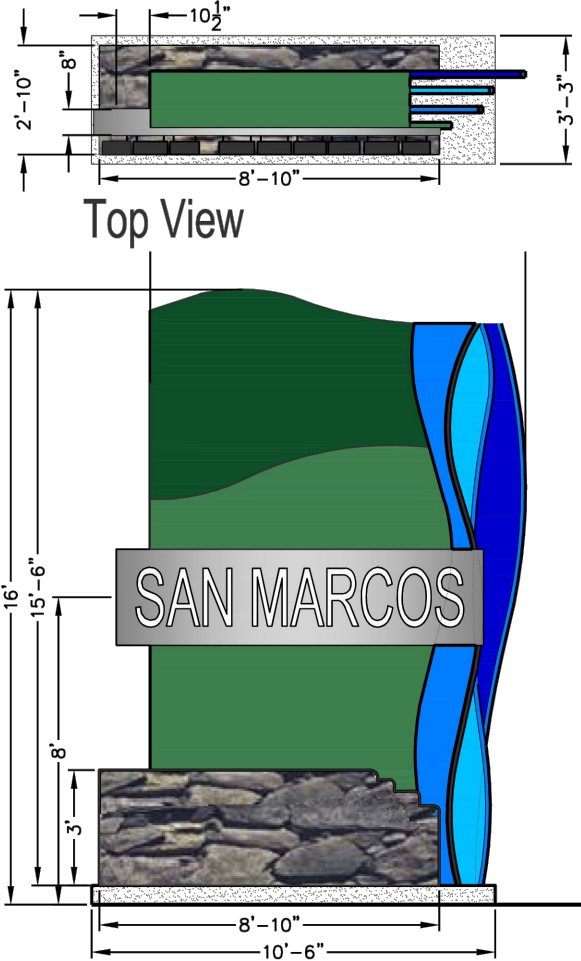

- NOTES:
1. ALL SHEET METAL SHALL ALUMINUM, 0.125 GAUGE MINIMUM
 2. PRIOR TO FABRICATION
 - 2.1. CONTRACTOR SHALL FURNISH SHOP DRAWING FOR OWNER REVIEW
 - 2.2. CONTRACTOR SHALL PROVIDE ALL ATTACHMENT DETAILS FOR OWNER REVIEW
 - 2.3. CONTRACTOR SHALL PROVIDE PAINT SAMPLES FOR OWNER REVIEW
 3. FACE+HALO CHANNEL LETTERING ILLUMINATION
 - 3.1. SHALL BE RGBW
 - 3.2. SHALL BE REMOTELY CONTROLLED BY OWNER
 - 3.3. CONTROLLER LOCATION TO BE APPROVED BY OWNER
 4. HALO ILLUMINATED PAN ILLUMINATION
 - 4.1. SHALL BE ILLUMINATED BY THE FACING PAN
 5. ALL WIRING, LIGHT, CONTROLLERS SHALL BE SERVICEABLE.
 6. ALL ROCK FOR VENEER DRY STACK AT BASE SHALL BE LIMESTONE BUILDERS FROM:
EWING
8206 NORTH INTERSTATE HIGHWAY 35
NEW BRAUNFELS, TX, 78130
(REF. EWING QUOTE # 18814749)
 - 6.1. MATERIAL ITEM DESCRIPTION NUMBER: 9415022
 7. DRY STACK VENEER TO BE LIGHTLY MORTARED ON CUT SIDE WITH RAKED JOINTS, SO GROUT IS NOT VISIBLE TO PUBLIC.

SCALE: NTS

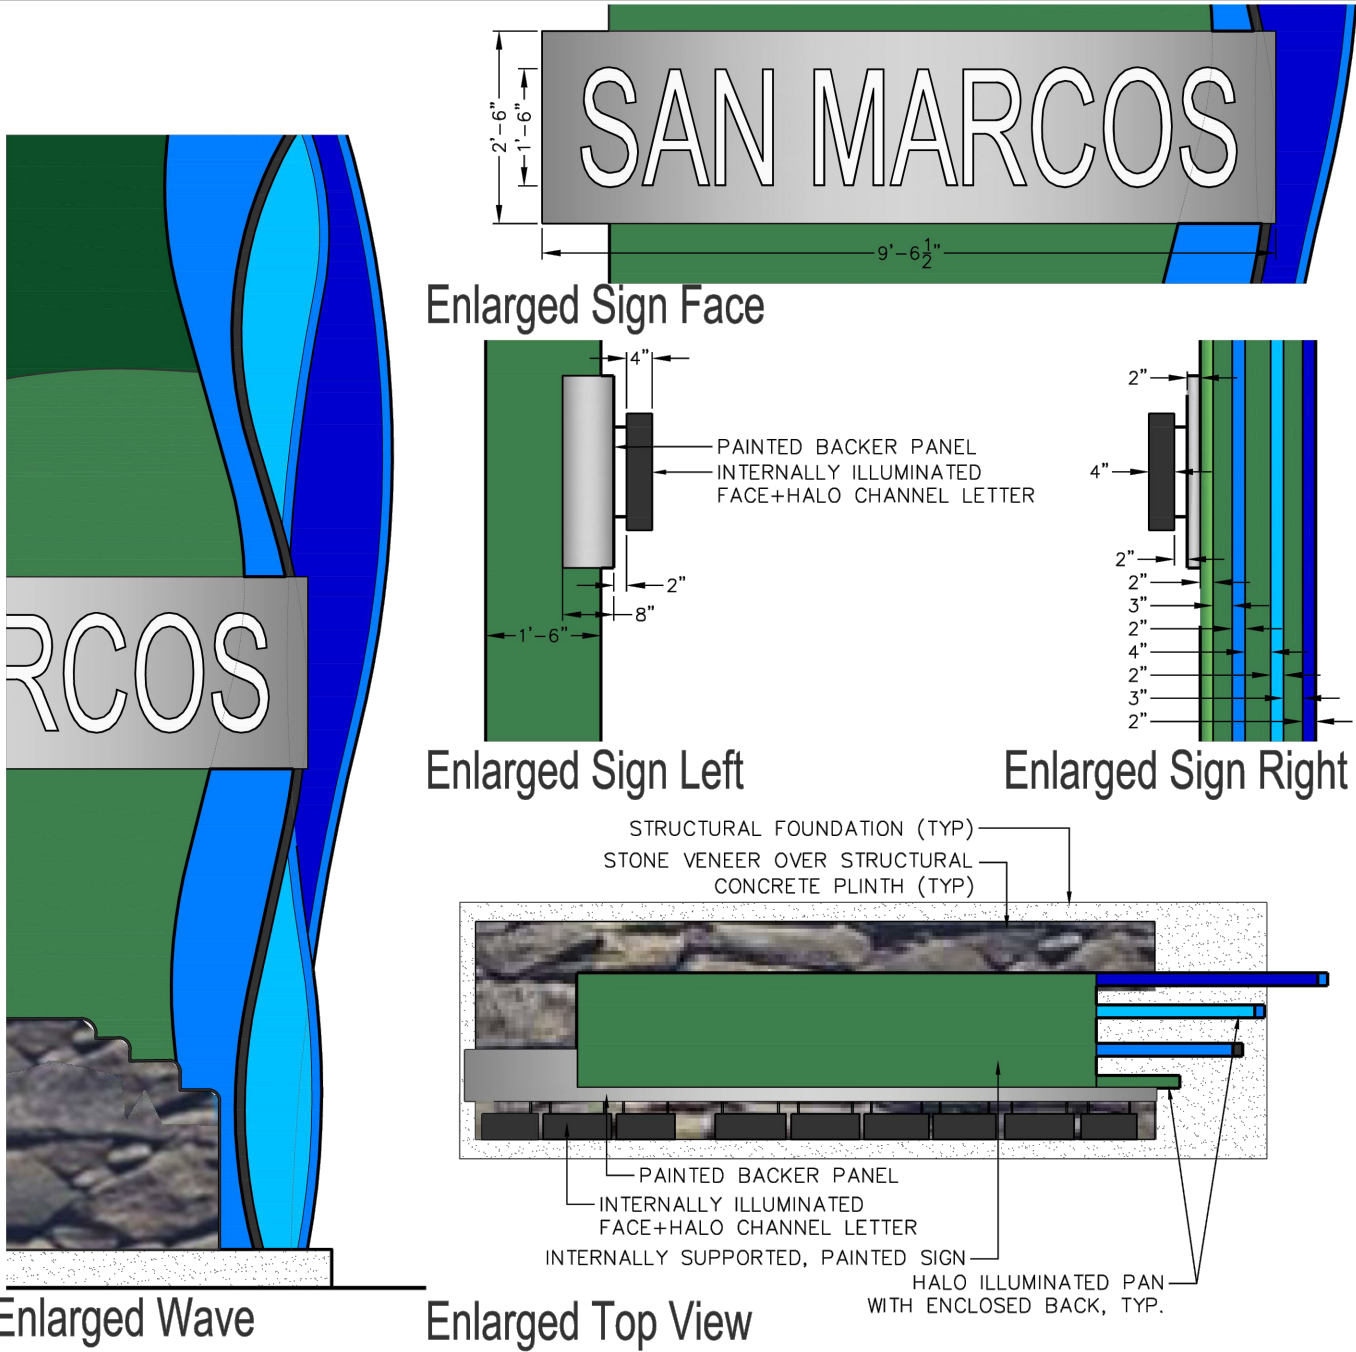

 9001 N IH35 Suite 102 Austin, Texas 78753 p: 512.453.0767 f: 512.453.1734	APPROVED SIGN	PLOTTED: 10/9/2024 JOB NO: 0305-004
	CITY OF SAN MARCOS GATEWAY MONUMENT SIGN SAN MARCOS, TEXAS	L004 5 OF 49

File: Y:\0305-004_CoSM_Gateway\CAD\Sheets\Cover Sheet.dwg