



CITY OF SAN MARCOS CONSTRUCTION CHANGE ORDER

PROJECT: Police Department Additions & Renovations
CONTRACT NO.: 220-149

Date Prepared: 07.21.2021
Change Order #: 8

CONTRACTOR: Trimbuilt Construction Inc
ADDRESS: 12800 North Lamar Blvd.
CITY/STATE/ZIP: Austin, TX 78753

We are submitting this Change Order to the referenced contract. In consideration of the Change Order agreed to herein as complete equitable adjustments and full and final payment for the Contractor's additional work, the Contractor hereby releases the Owner from any and all liability under this contract for further equitable adjustments, including additional time for performance, attributable to such facts or circumstances giving rise to the proposal for adjustment.

This authorization provides for the following modifications or additions: Add asphalt & Base material & Labor to widen SWAT drive lane / Less concrete for impervious cover / Add dispatch railing.

I. Explanation of Items								
ITEM NUMBER	ITEM SPEC REF.	DESCRIPTION	PREVIOUS QUANTITY	REVISED QUANTITY	CHANGE IN QUANTITY	UNIT	UNIT PRICE	TOTAL
TCI #22 REV 3	ITEM #	Shooting Range -Ballistic containment			0			\$49,510.88
	ITEM #				0			\$0.00
	ITEM #				0			\$0.00
	ITEM #				0			\$0.00
	ITEM #				0			\$0.00
TOTAL FOR BID CATEGORY						SUB TOTAL I:	\$49,510.88	







II. Explanation of Items								
ITEM NUMBER	ITEM SPEC REF.	DESCRIPTION	PREVIOUS QUANTITY	REVISED QUANTITY	CHANGE IN QUANTITY	UNIT	UNIT PRICE	TOTAL
ITEM #	ITEM #	ITEM DESCRIPTION			0			
ITEM #	ITEM #	ITEM DESCRIPTION			0			\$0.00
ITEM #	ITEM #	ITEM DESCRIPTION			0			\$0.00
ITEM #	ITEM #	ITEM DESCRIPTION			0			\$0.00
TOTAL FOR BID CATEGORY						SUB TOTAL II:	\$0.00	

TOTAL CHANGE ORDER **TOTAL I+II:** \$49,510.88

CHANGE IN DAYS REQUESTED FOR CHANGE ORDER Under Jacobs Review 4

Date	Contract Document	Amount	Days	Running Sum	% Change \$
	ORIGINAL CONTRACT AMOUNT:.....	\$9,141,358.00	0	\$9,141,358.00	0.0%
	CHANGE ORDER 1-5:	\$279,587.85	0	\$9,420,945.85	3.1%
TCI - 6.26.21	CHANGE ORDER 6:	\$7,542.54	0	\$9,428,488.39	3.1%
TCI - 6.29.21	CHANGE ORDER 7:	\$10,844.52	0	\$9,439,332.91	3.3%
TCI - 7.10.21	CHANGE ORDER 8:	\$49,510.88	0	\$9,488,843.79	3.8%
	CHANGE ORDER 9:	\$0.00	0	\$9,488,843.79	3.8%
	REVISED CONTRACT AMOUNT/DAYS:.....	\$9,488,843.79	0		

Your signature below will constitute your acceptance of this Change Order:

1. Prepared By Project Manager:  Kristy Rembert <small>Digitally signed by Kristy Rembert DN: C=US, E=kristy.rembert@jacobs.com, O=Jacobs, CN=Kristy Rembert Date: 2021.07.27 13:16:47-0500'</small> Date: 07/27/2021		2. Contractor: Trimbuilt Construction, Inc.  Tracy D. San Senior Project Manager Date: 7/21/2021	
3. Recommended by Design Consultant: KGA  Partner Date: 21jul21		4. Recommended by Department Director: DocuSigned by:  Chase Stapp Date: 7/28/2021	
5. Reviewed by Finance: DocuSigned by:  Rachel Stulten Contractor Administrator Date: 7/28/2021		6. Approved By: DocuSigned by:  Lynda Williams City Manager Purchasing Manager Date: 7/29/2021	

Distribution List: Project Manager
 Finance Department - Contract Administration
 Contractor
 Inspector

P. O. Box 80169
Austin, TX 78708-0169
(512) 832-1979



Trimbuilt Construction, Inc.

We build **INSPIRATION**

Change Request

To: City of San Marcos
630 E Hopkins St
San Marcos, TX 78666

Number: C-22
Date: 7/9/2021
Project: San Marcos Police Station
Job #: 6488E

PH: (512) 393-8175 Fax:

Description: Range -Ballistic containment

We are pleased to offer the following specifications and pricing to make the following changes:

- * Ballistic Containment SMPD - Action Item #11 Per Barker Structural SK9a The only way to build the extension is to remove the steel baffles at grid REa. HR Marc removing one row of rubber blocks and reinstalling in needed areas only.
- * Existing row of ballistic plate will have to be removed. Priced SK9A with weld plates and anchoring plates no difference in price. Forklift will be required for removal and installation of existing ballistic plates, Priced with Trimbuilt providing forklift for use.

Description:	Price
Concrete	25,577.15
Steel Fab Erect	18,975.00
Superintendent	855.00
Project Management	225.00
Insurance	684.48
P & P Bond	912.64
Fee	2,281.61
Total:	49,510.88

If you have any questions, please contact me at 512-832-1979.

Submitted by:

Approved By: _____

Trimbuilt Construction, Inc.

Date: _____

cc:

H. R. MARC CO. INC
PO BOX 279
HUTTO, TX 78634
PHONE (512) 846-2703
FAX (512) 846-2742

With Trimbuilt mark ups.

TO: Trimbuilt Construction
 ATTN: Troy Saint
 REF: SMPD
Change Order

DATE: 07.09.2021
July 8, 2021
 PH: _____
 PAGES: 1

**SCOPE OF WORK FOR
 THE FOLLOWING CONCRETE ITEMS:**

CHANGE ORDER

ADD

CONCRETE WALL EXTENSION		
LABOR	\$	12,856.00
MATERIAL	\$	6,385.00
EQUIPMENT	\$	3,000.00
OH & PROFIT 15%	\$	3,600.00
TOTAL	\$	\$25,577.15

Trimbuilt Notes-
 Ballistic Containment
 SMPD - Action Item #11
 Per Barker Structural SK9a
 The only way to build the extension is to remove the steel baffles at grid REa.

~~ALT FOR WELD PLATE EMBEDS~~
~~\$100 EA EMBED~~

Trimbuilt Notes-Not needed

SHOOTING RANGE CORES		
24- 12" CORES W/ SLEEVES		
LABOR	\$	6,380.00
EQUIPMENT	\$	1,205.00
MATERIAL	\$	350.00
OH & PROFIT 15%	\$	1,400.00
TOTAL	\$	\$9,125.25

Trimbuilt Notes-Police Department Request 24 each (Yard Line Posts Cores) Not on drawings. Core 12" circles, dig out 12" deep, install cup sleeves and place concrete.

TRICKLE CHANNEL RFI #93		
LABOR	\$	2,000.00
EQUIPMENT	\$	1,500.00
MATERIAL	\$	1,800.00
OH & PROFIT 15%	\$	900.00
TOTAL	\$	\$6,095.00

Trimbuilt Notes-RFI #93 addressed drainage issues. Added 18" wide concrete drainage curb channel the length of Shooting Range West Berm edge on canopy drip line center.

Trimbuilt Notes- Cost for item #1 - \$25,577.15

07.21.2021

~~7/8/2021~~
~~07.09.2021~~

PRO FAB

Custom Fabrication & Welding, Inc.

Proposal

Date: 7/09/21

Pro Fab Job No. 27746

Proposal: Trimbuilt

Attn: Troy Saint

Job Name: SMPD Shooting Range

Customer Project No. 6488E_____

Description: SMPD SK9A

Remove back row of ballistic plate and reinstall after work for SK9A has been finished.
Remove/Reinstall ballistic plate = \$4800.00

Fabricate base plate, 3x3x1/4 angle iron and weld to existing 4x4 angle iron per details of drawing SK9A.

Items for SK9A = \$11,700.00

NOTE: Existing row of ballistic plate will have to be removed. Priced SK9A with weld plates and anchoring plates no difference in price. Forklift will be required for removal and installation of existing ballistic plates, Priced with Trimbuilt providing forklift for use. Pricing excludes all concrete, grout and coating on steel. Shop Drawings are not included in pricing.

Subtotal: \$ 16,500.00

OH/P: \$ 2,475.00

Proposal: \$ 18,975.00

Sales Tax Status: Tax included on Materials_____

SPECIAL NOTES:

Payment Terms: Net 30

Any alteration or deviation from above specification involving extra costs, will be executed only upon written orders, and will become an extra charge over and above the estimate. All agreements contingent upon accidents or delays beyond our control.

Respectfully submitted:

Pro-Fab Custom Fabrication & Welding, Inc.

By: Eric Stifflemire

PRO FAB

Custom Fabrication & Welding, Inc.

Proposal

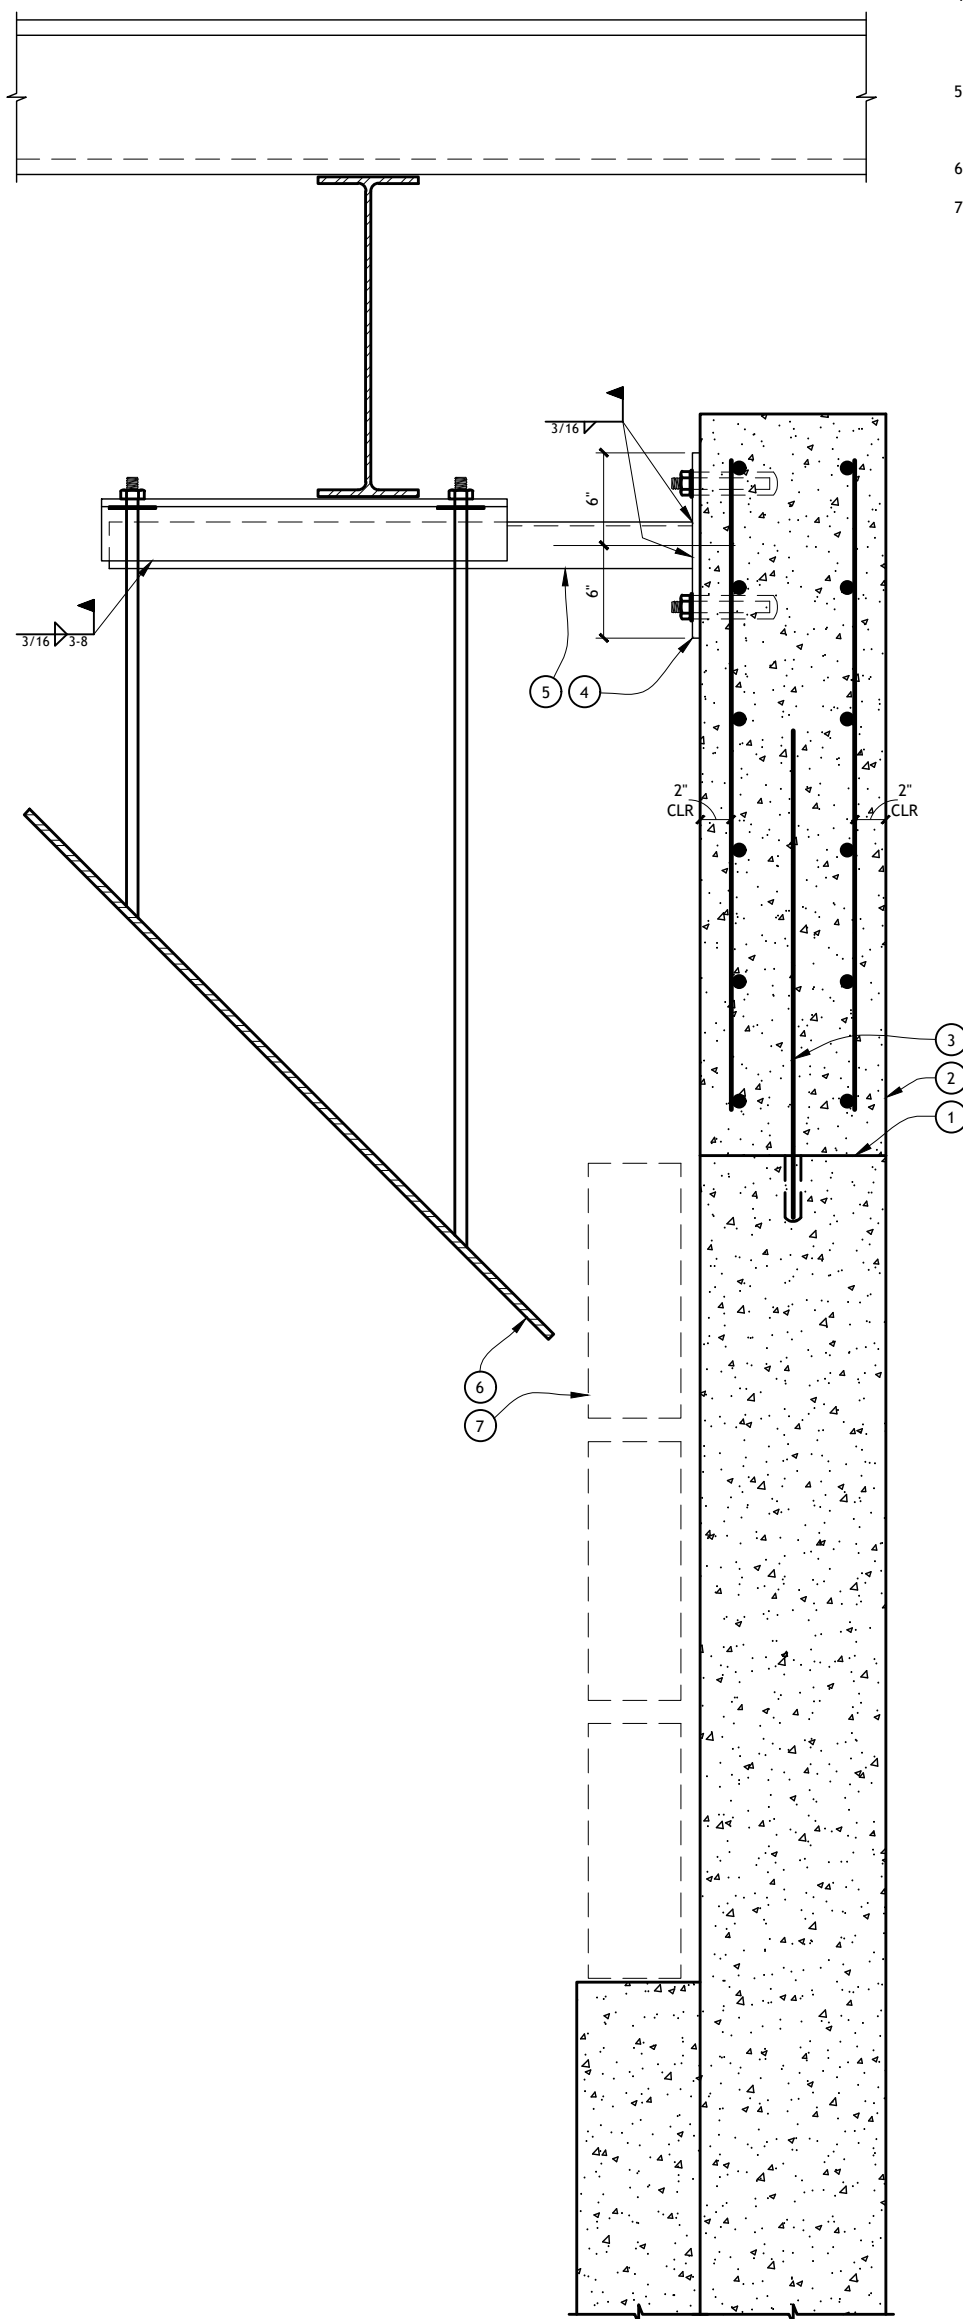
Acceptance of Change Order

The above prices, specifications and conditions are satisfactory and are hereby accepted. Pro-Fab is authorized to do the work as specified. Payment will be made as outlined above.

Accepted by: Signature: _____

Date: _____

Print Name/Title: _____



1. CONCRETE WALL.
2. NEW 12" CONCRETE WALL WITH #6 VERTS AT 14" O.C. EACH FACE AND #4 HORIZONTALS AT 16" O.C. EACH FACE. SLOPE TOP OF WALL PER ARCH'L.
3. #5 DOWEL WITH HILTI HY-200 EPOXY AT 24" O.C. EMBEDDED 4" MINIMUM PER ESR-3187.
4. 1/4x1'-0"x0'-4" STEEL PLATE WITH (2) 3/4"Ø HILTI HY-200 EPOXY ANCHORS AT 8" O.C. EMBEDDED 4" MINIMUM PER ESR-3187.
5. STEEL ANGLE - 3x3x1/4 LAPPED WITH EACH EXISTING HORIZONTAL STEEL ANGLE.
6. LINE OF STEEL BAFFLE - SEE ARCH'L.
7. LINE OF BALLISTIC RUBBER BLOCKS - SEE ARCH'L.

STEEL BAFFLE SUPPORT AT CONCRETE WALL

219504DS503-9

SK9A

CHK'D BY: KMB

JOB No: 219504

DATE: 7/02/2021

219504DS503-9

B BARKER STRUCTURAL

FIRM #F-12673 5960 S. RAINBOW BLVD. SUITE 300
 4040 BROADWAY ST, SUITE 604 SAN ANTONIO, TX 78209 LAS VEGAS, NV 89118
 210.446.5500 WWW.BARKERSTRUCTURAL.COM 702.310.8000

**SAN MARCOS PD
 RENOVATION & ADDITION**

JULY 02, 2021

